

# Agilent Online UV-Vis Dissolution Systems

Advancing dissolution automation



## Agilent Online UV-Vis Dissolution Systems—Your Choice of Solutions from a Single Provider

For powerful, versatile UV dissolution analysis, look no further than Agilent's portfolio of automated online solutions. Our UV dissolution systems feature the Cary 60 UV-Vis Spectrophotometer, providing options for online or offline use, as well as multicell-based analysis or *in situ* measurement via fiber optics.

#### **Cary 60 UV Dissolution Systems**

#### **Multicell UV dissolution**

- The multicell changer integrates one or two dissolution apparatus, providing each vessel with an individual flow cell to prevent cross-contamination.
- Sample is moved and filtered using either a peristaltic pump or 850-DS Sampling Station, which can archive or collect samples for HPLC analysis.

#### Fiber optic dissolution

- Accelerates analysis using a fiber optic multiplexer to support either one or two dissolution apparatus.
- Analyzes samples *in situ* through fiber optic probes mounted on a moveable manifold that ensures precise sampling position and minimizes hydrodynamic disturbances.



The Agilent 708-DS, Cary 60, and Cary WinUV Dissolution Software comprise the complete Agilent Fiber Optic UV Dissolution System.

#### UV dissolution system selection chart

Cary 60 UV-Vis Spectrophotometers



	Multicell	Fiber Optic
General information		
Software package	Cary WinUV	Cary WinUV
Number of apparatus	1 to 2	1 to 2
Spectrophotometer details		
Wavelength range	190-1100 nm	190-1100 nm
Slit width	1.5 nm	1.5 nm
Lamp type	Xenon flash	Xenon flash
Instrument design	Scanning	Scanning
Wavelength accuracy	< ± 0.5 nm	< ± 0.5 nm
Wavelength reproducibility	± 0.1 nm	± 0.1 nm
Photometric accuracy	± 0.005 Abs (NIST 930D)	± 0.005 Abs (NIST 930D)
Photometric noise	± 0.0001 Abs	± 0.0008 Abs
Baseline flatness	< 0.001 Abs	< 0.004 Abs
Stray light	< 1.0% (198 nm) < 0.05% (220 nm) < 0.05% (370 nm)	< 0.05% (370 nm)
Online sampling system details		
Closed loop sampling	Yes	N/A
Path lengths (mm)	0.2, 0.5, 1, 2, 5, 10	1, 2, 5, 10, 20
Automated dosage delivery	Yes	Yes
Temperature monitoring	Yes	Yes
Sampling	Simultaneous	Sequential
Sample filtration (min. pore size µm)	0.2 or 0.45 μm (with 850-DS and optional filtration module)	N/A
Sample archival	Yes (with 850-DS Dissolution Sampling Station)	N/A

## Cary 60 Online UV Dissolution



The Cary 60 UV-Vis Spectrophotometer integrates dissolution testing with online UV analysis to provide a single-source, automated performance testing solution.


#### Cary 60 Online Multicell UV Dissolution System

Precise and accurate determination of dissolution concentrations is achieved with the Cary 60 and online UV-visible methods. These methods remain among the most common analytical techniques for dissolution sample analysis.


- Available in either single- or dual-apparatus configurations, the system supports individual flow cells for a range of path lengths, from 0.2 to 10 mm.
- The multicell changer accommodates eight flow cells per dissolution apparatus, allowing for a blank, a standard, and six samples.
- The system can take both blank and standard readings during each time point; alternatively, offline values may be used.
- Each vessel contains its own flow cell and tubing, eliminating crosscontamination.
- Can support a peristaltic pump or 850-DS Dissolution Sampling Station for added filtration or sample archival for online or offline sample analysis.

With a proven optical design that exceeds pharmacopeia performance specifications, the Agilent Cary 60 UV Dissolution System is well suited for online analysis. The spectrophotometer accommodates either a multicell changer or rotary multiplexer for single- or dual-apparatus online UV dissolution testing.



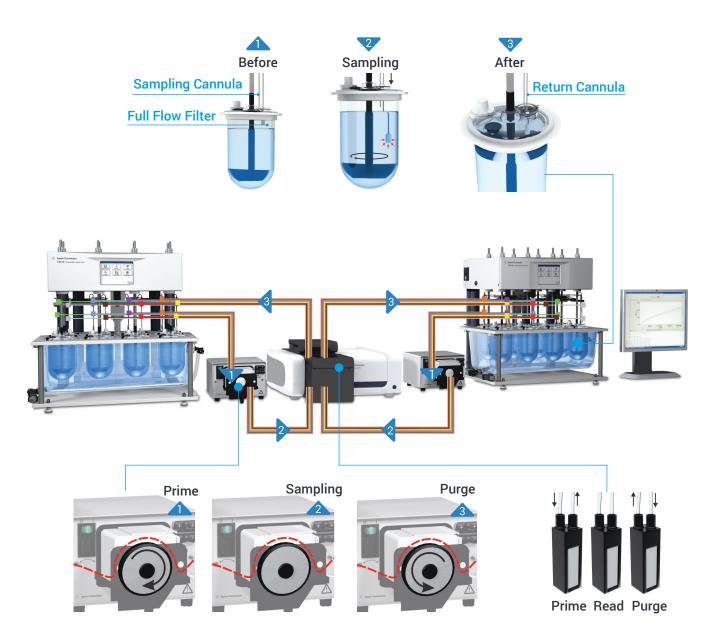

One Cary 60 UV-Vis Spectrophotometer can support two dissolution apparatus running independent methods.

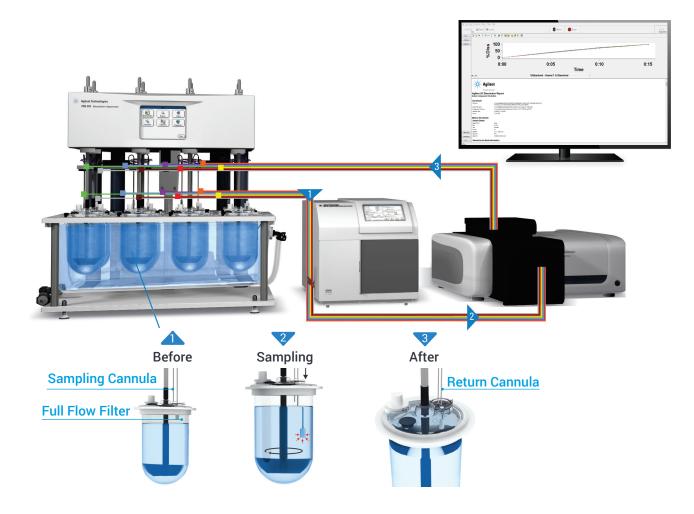

The online UV dissolution system with 850-DS provides individual flow paths for each vessel, eliminating cross-contamination.



Using the Agilent 850-DS with the Cary 60 Online Multicell UV Dissolution System provides for online UV dissolution analysis as well as offline HPLC sample collection.

#### Cary 60 Online Fiber Optic UV Dissolution System

The fiber optic system offers versatility and flexibility while delivering the highest level of automation and data integration for your online UV dissolution needs. The Cary 60 UV-Vis Spectrophotometer provides excellent optical transmission and reproducibility capabilities, and the extended linear photometric range is ideally suited for fiber optic analysis. The fiber optic multiplexer ensures precise and rapid position-to-position movement to decrease the time needed between sample time points.

- Ideal for rapid time point requirements with the ability to take readings as often as every 45 seconds
- Samples are read directly in the dissolution vessel
- Corrects for samples with excipient and background interferences
- Cleaning is simple, requiring only rinsing and wiping of the fiber optic probes and tips
- Fewer moving parts and consumables reduce cost of ownership



Probes use silica fibers for optimal performance. Interchangeable tips with path lengths from 1 to 20 mm are substituted as needed without investing in new probes.



Agilent's Fiber Optic UV Dissolution System is available in single- or dual-apparatus configurations.

# An Ideal Platform for Online Analysis



The Agilent Cary 60 UV-Vis Spectrophotometer provides accurate, reliable, and costeffective results for both multicell and fiber optic online UV dissolution systems.

#### The power of xenon

Based on the proven performance of its pioneering UV-Vis technology, the Cary 60 is:


**Room-light immune.** The unique optical design enables measurements to be made with the sample compartment open, allowing large or odd-shaped samples to be measured. The highly focused beam also provides coupling that is superior to fiber optics, making the Agilent Cary 60 the best choice for UV-Vis fiber optic measurements.


**Robust.** The combination of the xenon lamp and superior mechanical design ensures the inherent reliability of the Agilent Cary 60, significantly reducing cost of ownership—average lamp lifetime is 10 years under typical laboratory usage conditions.

**Efficient.** The lamp only flashes when a reading is taken, resulting in zero warm-up time and very low electrical energy use and maintenance requirements. Photodegradation is also eliminated, as precious or light-sensitive samples are not excessively exposed to UV light or heat.

### Superior accuracy and photometric linear range

Using certified standards (Starna, S/N 14727, set type RM-9ND) and measuring the absorbance at 525 nm using a 1second signal averaging time, the chart demonstrates that the photometric range of the Agilent Cary 60 extends above 3.5 absorbance units with a correlation coefficient of 0.999.

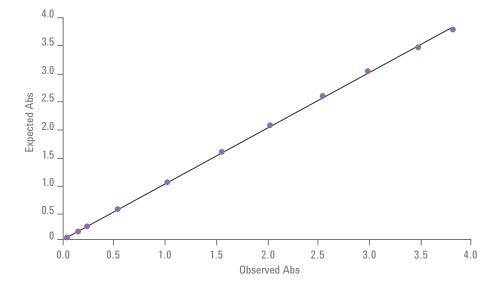

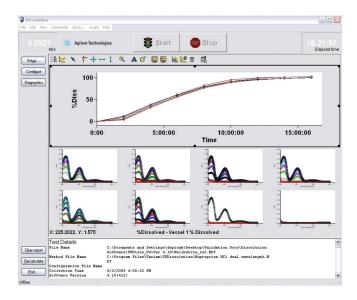

UV Dissolution Method Setup		_
Method Setup     Method Setup     Samping Points     Product     Product Information     Media     Media Change     Tester     Forder     Spindle	Method Setup Method Name Dissolution Method	
Spindle Media2     Temperature     Sampling Parameters     Sandards     Standards     Standards Selection     Standards Information     Standards Information Media 2     Control Limits	⊙ Single Tester ○ Dual Tester	<ul> <li>✓ Allow Media Change</li> <li>Ful Media Replacement</li> <li>✓ Use Fraction Collector</li> <li>□ Qual Sample</li> <li>✓ Use Cary 50</li> </ul>
Spectrophotometer     Cell Match     Pre-test     Analysis     Analysis     Correction	Approval Setup By Chemist 1 Approved By	4/14/2009 💌 2:37:08 PM 💠
Concection Media 2 Sample Limits Print Options Data Time Points Discolution Points Graph Display	Supervisor	4/14/2009 💌 4:45:15 PM 🔄
		OK Cancel H

The Cary 60 UV Dissolution Software provides a flexible platform created especially for dissolution analysis.

#### **Cary 60 UV Dissolution Software**

Using a common platform for both the multicell and fiber optic systems, the Cary 60 UV Dissolution Software generates accurate and robust data and accommodates a broad range of dissolution samples and methods. Analysts can easily customize final reports with a complete summary of the data acquisition using comparison and statistical evaluation tools, data tables, and dissolution profiles.

The software supports the 708-DS Dissolution Apparatus and easily pairs with a peristaltic pump or the 850-DS Dissolution Sampling Station for accurate preparation of samples and optional archiving.

- You can control apparatus features, such as dosage delivery, automated sampling, and vessel temperature monitoring.
- Data processing and reports are available for samples taken offline using the UV dissolution manual program.
- Media change methods, capsule blank correction, and check standards are all supported.
- Offline standards can be used in a variety of ways to prevent standard preparation for each test.
- Test reports can be customized to include relevant data in your desired format.
- 21 CFR Part 11 compliance package is included for electronic records and secure data storage.



The Cary 60 uses xenon flash lamp technology to provide a linear absorbance range of greater than 3.5 Abs, supporting a variety of pharmaceutical samples or turbid solutions. The remarkably long lamp life coupled with exceptionally fast data collection – able to scan the entire wavelength range (190–1100 nm) in under 3 seconds – make this spectrophotometer an indispensable part of your laboratory.

## Agilent Cary WinUV with SCM/SDA: 21 CFR Part 11 Compliance

Part 11 in Title 21 of the Code of Federal Regulations includes US federal guidelines for storing and protecting electronic records and applying electronic signatures. The intent of these guidelines is to ensure that applicable electronic records are reliable, authentic, and maintained with high integrity.

#### Simplify compliance

The features and functionality of Agilent Cary WinUV software in combination with the Spectroscopy Configuration Manager (SCM) and Spectroscopy Database Administrator (SDA) provide you with the data management and electronic traceability that can simplify implementation of these guide-lines in your laboratory.

This software controls system access, user roles management, data transfer, and audit trails. It also ensures secure record keeping and provides capabilities for data archiving. Using Agilent Cary WinUV with SCM/SDA provides support for all compliance requirements mandated by 21 CFR Part 11. In particular, it ensures:

- Accurate and complete copies of records
- Administration for user accounts and passwords
- Administration for user access privileges within the application
- Electronic signature functionality
- Records of changes captured in user-independent, time-stamped audit trails

These settings can be configured during installation to meet specific standard operation procedures and security guidelines. This includes customizable user roles and privileges that provide levels of access to the application software and functionality to individual users or groups. Changes to the security configuration can be made only by a dedicated system administrator.

Spectroscopy Configurat	2			
File User profiles View	Configuration Audit trail Op	ptions Help		
🤮 Organization 🔗	User profiles	<u> </u>	Current organization	
	Advanced User		🎖 😫 😂	
Groups	Auditor Basic User		C Group	
Eq. (1)	Default profile		NITIN(Advanced User)	
Projects	Service			
8	Super User	Edit User profile		x
Users			⊡- IX WinUV ⊕- IX Application	
			⊡ IX User Privileges	
User profiles				
<b>₽</b>			🗵 Edit all configurations	
Admin profiles	1		🔀 Edit all Methods 🔀 Edit own collected/manual data	a
	Properties		- 🔀 Edit own configurations - 🔀 Edit own Methods	
Stations	User profile		💌 Perform rereads 🖂 Read only	
<u>N</u> <u>N</u> <u>N</u>	name Advanced Us	8	🗖 Re-calculate	
Associations	Rights • WinUV • Ap		🗔 Reset Lamp Hours (Align) 🔀 Run ADL	
😟 Connections 🛛 🛠		- 24 ALLAND -	Save Lamp Energy (Align) Service	
Connections				
-			1	4 p :   -
		<u> Help</u> <u>X</u> Cancel		Previous Street
		○ Enzyme Kinetics		
	Administrato	r on 5CG6160TVN		li

🏟 Spectroscopy Database Administrato		• ×					
Information	Connections Database Server Accounts Database Accounts Log Information Preferences						
Getting started Help for Help contents Help About www.agilen.com email Home Configure system	<ul> <li>Creating a database.         <ul> <li>A database must be created before a user can store application data.</li> <li>To create a database:                  <ol></ol></li></ul></li></ul>						
Detach a database Attach a database Backup a database Restore a database User accounts Server Database Advanced Setup	Oreate       Upgrade       Backup       Restore       Attach       Detach       Information       Viewer       Copy folders         New database details       Schema scripts       Databases       Attached       Detached         Spectroscopy Databases       Location       C:Spectroscopy Databases       VAIMDB_UV-Diss_001(000)         Create       1 ÷ extra databases       Size (Mb)       Size (Mb)       Size (Mb)       Size (Mb)						
Load Defaults	State       Register Workspaces         State       VAIM.Workspace.Cary, Version=2.4.0.3, Culture=neutral, PublicKeyToken=1         VAIM.Workspace.Cary, Version=2.5.0.4, Culture=neutral, PublicKeyToken=4         ValM.Workspace.Cary, Version=2.5.0.4, Culture=neutral, PublicKeyToken=4						

Learn more: www.agilent.com/lifesciences/dissolution

Buy online: www.agilent.com/chem/store

U.S. and Canada 1-800-227-9770 agilent\_inquiries@agilent.com

Europe info\_agilent@agilent.com

India customercare.india@agilent.com

Asia Pacific inquiry\_lsca@agilent.com



This information is subject to change without notice.

© Agilent Technologies, Inc. 2018 Published in the USA, November 1, 2018 5991-4048EN